

## Block for boom nok

OH Marine Equipment has made a new High Performance block size 57, which will make it easier to pull the mainsheet from the cockpit.

If your track and mainsheet traveller is mounted on the roof in front of the sprayhood this block will make it possible to turn around the mainsheet and you can pull from the end of the boom instead of the roof. Both systems can be maintained by mounting an extra block.

The block consists of a single block with adjustable cam cleat and a fitting in the top for mounting in the groove in the boom.

As the other High Performance block sizes the block is developed with emphasis on design and strength. The aluminium ball bearing sheave is produced with 3 rows of delrin balls for smooth running even under heavy loads. On request the block is also available with a plan bearing delrin sheave.

The block is supplied in standard polishing or high polished stainless steel.



Article no. 710725


### Block features:

Block side in 2 mm stainless steel 316 bolted together with an allen screw for easy disassembling if needed - rivets in the top


Ball bearing sheave in aluminium (6082 T6) natural anodised (minimum 25 my) with 3 rows of delrin balls

Article No.	Type	SWL kg	BL kg	Sheave size mm	Max rope mm	Weight g
710725	Single block with cam cleat for boom nok	1400	2800	57 x 16	14	540


When ordering the block it is very important to give up the 4 measures (A, B, C & D) shown on the drawing below to make sure that the fitting in the top will be made to fit the groove in the boom.

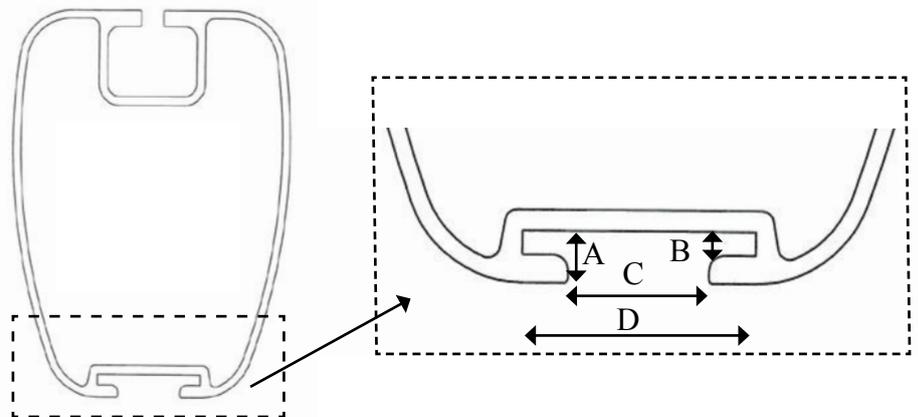

### Drawings showing how to mount the block:

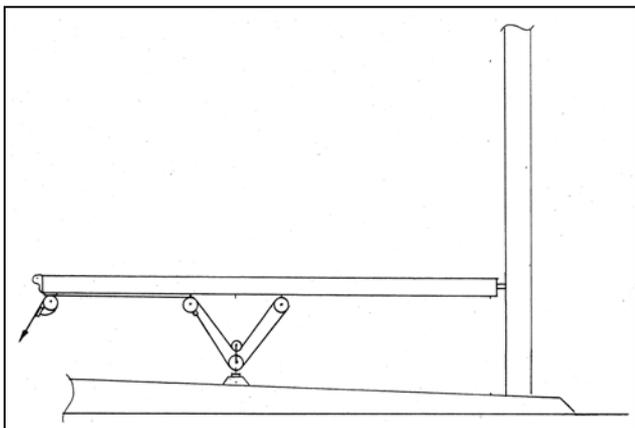

*This is the way to mount the block if you want to use only one system.*

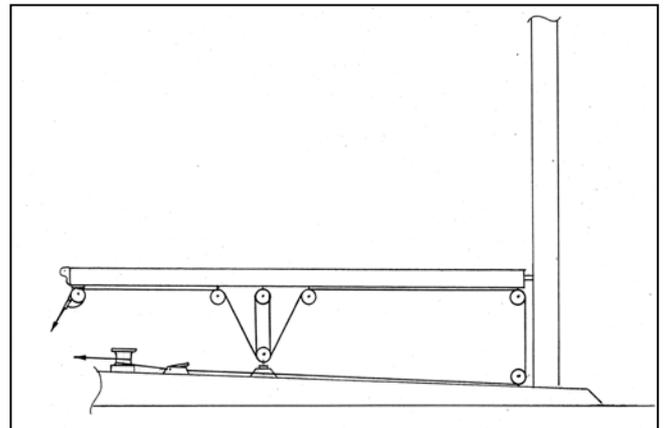

*This is the way to mount the block if you want the possibility to use both systems. Please notice that you then have to mount an extra block.*